
Bradnam's

sliding doors





The Bradnam's Difference

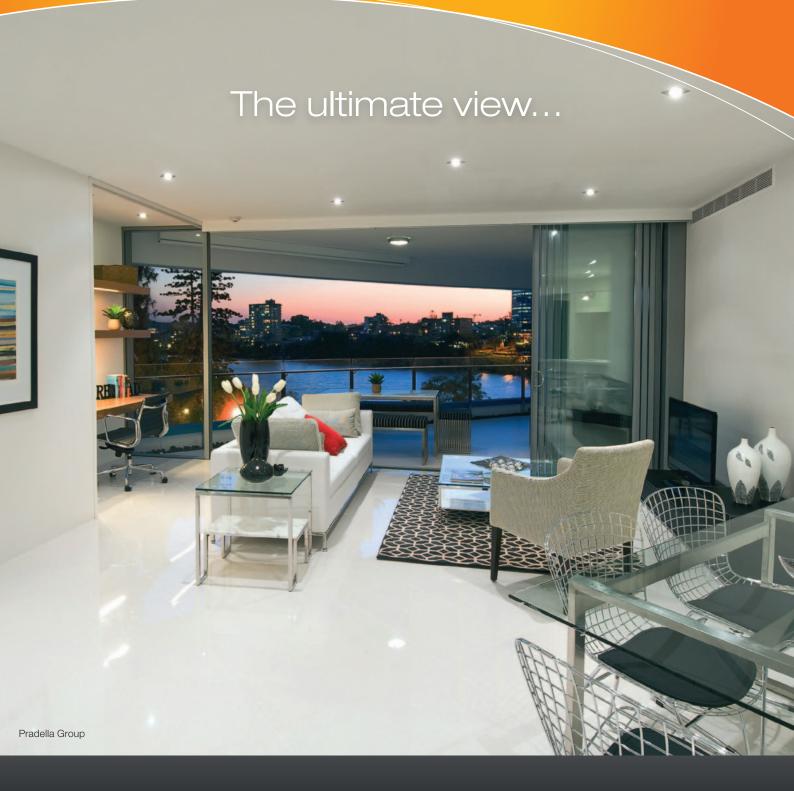


essential range

Key Features and Benefits

- Mortice locks fitted in stylish handles for superior security
- Conveniently located key cylinders allow for easy operation
- Precision Euro track roller system for effortless, smooth sliding action
- Curtain-protecting design with rounded and capped sections rather than sharp edges
- Security and insect screens are easily installed
- Easy cleaning design thanks to wide door tracks that comfortably fit most vacuum heads

Performance Parameters

Frame sizes	80mm / 140mm
Maximum door height	2450mm
Maximum door width	6246mm
Maximum panel width	1350mm
Maximum panel weight	50kg
Maximum water rating	300pa
Maximum wind rating	3300Pa ULS
Maximum glass thickness	6.76mm
Maximum acoustic rating	Rw30
Maximum bushfire rating	BAL 40

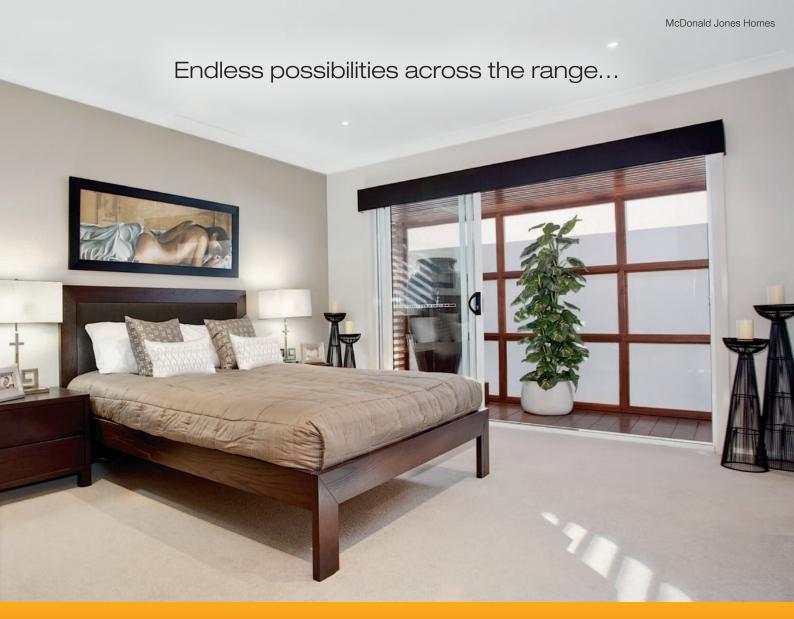

signature range

Key Features and Benefits

- Innovative corner and cavity configurations for luxury indoor/outdoor living
- Unobstructed views and natural light thanks to slimline frame profiles
- Curtain-friendly design with rounded and capped sections to protect your window furnishings from sharp edges
- Superior security thanks to mortice locks
- Easy smooth sliding action with our precision Euro track rollers
- Superior protection from the elements thanks to Santoprene seals

Performance Parameters

Frame sizes	100mm / 166mm
Maximum door height	2700mm
Maximum door width	6246mm
Maximum panel width	1350mm
Maximum panel weight	100kg
Maximum water rating	600pa*
Maximum wind rating	4500Pa ULS
Maximum glass thickness	12.76mm (single glazed) 20mm (IGUs)
Maximum acoustic rating	Rw44
Maximum bushfire rating	BAL 40

^{*} Does not apply to 166mm frame

The performance figures above do not apply to cavity configurations



commercial range

Key Features and Benefits

- Innovative corner and cavity configurations allow for the creation of luxury indoor/outdoor spaces
- Heavy duty wheel carriages (double and triple bogey) ensure a smooth sliding action
- Stainless steel fixings on all products
- Optional low profile sill provides safe and easy access for pedestrian and wheeled traffic
- Stylish and secure handles with mortice locks
- Single and double glazing options provide thermal and acoustic insulation

Performance Parameters

Frame sizes	100mm / 150mm 200mm / 250mm
Maximum door height	3100mm
Maximum door width	12000mm
Maximum panel width	1800mm
Maximum panel weight	160kg
Maximum water rating	650pa
Maximum wind rating	6000Pa ULS
Maximum glass thickness	10.76mm (single glazed) 28mm (IGUs)
Maximum acoustic rating	Rw34
Maximum bushfire rating	BAL 40

The performance figures above do not apply to cavity configurations




cavity sliding doors

signature | commercial

A fusion of ingenuity and practicality

Bradnam's **Cavity Sliding Doors** will revolutionise how outdoor and entertainment areas are designed. Unlike traditional 'entertainment doors' such as stacker doors or bi-fold doors, our Cavity Doors truly provide unobstructed views and access. Seamlessly gliding out of sight, they don't have fixed or folded panels blocking the view or access from the inside to the outside.



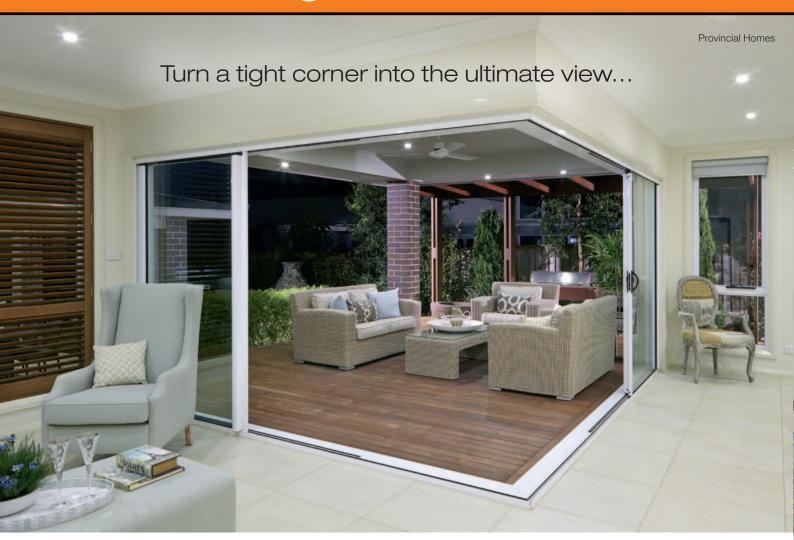

Spectacular from any angle

Be it a new architecturally designed home or a renovation enhancement of an existing property, our **Corner Sliding Doors** are perfect for joining living areas with gardens, patios or pool areas. They are capable of spanning either a 90 or 135 degree angle without a post, providing better access and view compared to standard sliding or stacker doors.

windows | doors | insect & safety screens



Bradnam's products are proudly made in Australia and designed specifically to meet all Australian conditions **Note:** Products may be subject to local variation, regulatory requirements and confirmation of structural performance. Screening not available in selected configurations.











